

STRADA

MANUFACTURED BY:



- Discreet slim-line design with a flat front panel and stylish aluminium grille.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Suitable for an integrated valve and concealed connection.
- Safe surface temperature.



30 YEAR*
WARRANTY



FINISHES

High gloss white or sandblast metallic grey as standard, unique finish both scratch and corrosion resistant.

FINISHES

Traffic white RAL 9016 (133)
Sandblast grey (001)

MEASUREMENTS

Heights from 200mm to 950mm.

Widths from 500mm up to 2800mm.

Depths of 115mm, 165mm and 215mm.

TRAFFIC WHITE - RAL 9016



DYNAMIC BOOST EFFECT (OPTIONAL)



MELBOURNE

Head Office & Showroom
11 Fiveways Blvd
Keysborough VIC 3173
P: 1300 001 800

SYDNEY

Showroom & Warehouse
Unit G7, Alexandria Industrial Estate
35-39 Bourke Road, Alexandria NSW 2015
P: 02 7209 6235



enquiries@huntheat.com.au




huntheat.com.au

Tables based on ΔT 50° C - mean water temperature in radiator of 70°C and room temperature of 20°C.
Radiator outputs to EN442 Standard.

STANDARD																
H-mm		200			350			500			650			950		
		Type			Type			Type			Type			Type		
L-mm		10	15	20	10	15	20	10	15	20	10	15	20	10	15	20
500	kW	0.328	0.545	0.766	0.449	0.735	1.030	0.538	0.867	1.213	0.606	0.961	1.343	-	-	-
600	kW	0.393	0.654	0.919	0.539	0.882	1.236	0.646	1.040	1.455	0.727	1.153	1.611	0.836	1.288	1.765
700	kW	0.459	0.763	1.072	0.629	1.029	1.442	0.753	1.214	1.698	0.848	1.345	1.880	0.975	1.502	2.094
800	kW	0.524	0.872	1.226	0.718	1.176	1.648	0.861	1.387	1.940	0.969	1.538	2.148	1.114	1.717	2.394
900	kW	0.590	0.981	1.379	0.808	1.323	1.854	0.968	1.561	2.183	1.090	1.730	2.417	1.254	1.931	2.693
1000	kW	0.655	1.090	1.532	0.898	1.470	2.060	1.076	1.734	2.425	1.211	1.922	2.685	1.393	2.146	2.992
1100	kW	0.721	1.199	1.685	0.988	1.617	2.266	1.184	1.907	2.668	1.332	2.114	2.954	1.532	2.361	3.291
1200	kW	0.786	1.308	1.838	1.078	1.764	2.472	1.291	2.081	2.910	1.453	2.306	3.222	1.672	2.575	3.590
1400	kW	0.917	1.526	2.145	1.257	2.058	2.884	1.506	2.428	3.395	1.695	2.691	3.759	1.950	3.004	4.189
1600	kW	1.048	1.744	2.451	1.437	2.352	3.296	1.722	2.774	3.880	1.938	3.075	4.296	-	-	-
1800	kW	1.179	1.962	2.758	1.616	2.646	3.708	1.937	3.121	4.365	2.180	3.460	4.833	-	-	-
2000	kW	1.310	2.180	3.064	1.796	2.940	4.120	2.152	3.468	4.850	2.422	3.844	5.370	-	-	-
2400	kW	1.572	2.616	3.977	2.155	3.528	4.944	2.582	4.162	5.820	2.906	4.613	6.444	-	-	-
2800	kW	1.834	3.052	4.290	2.514	4.116	5.768	3.013	4.855	6.790	3.391	5.269	7.363	-	-	-

TWIN																		
H-mm		200	350				500				650				950			
		Type	Type				Type				Type				Type			
L-mm		06	06	11	16	21	06	11	16	21	06	11	16	21	06	11	16	21
500	kW	0.269	0.395	0.598	0.797	1.057	0.474	0.693	0.949	1.291	0.533	0.772	1.087	1.515	-	-	-	-
600	kW	0.323	0.474	0.718	0.956	1.268	0.568	0.832	1.139	1.549	0.640	0.926	1.304	1.818	0.736	1.078	1.606	2.352
700	kW	0.377	0.553	0.837	1.115	1.480	0.663	0.970	1.329	1.807	0.746	1.080	1.521	2.121	0.858	1.257	1.874	2.744
800	kW	0.430	0.632	0.957	1.274	1.691	0.758	1.109	1.518	2.066	0.853	1.234	1.738	2.424	0.981	1.437	2.142	3.136
900	kW	0.484	0.711	1.076	1.434	1.903	0.852	1.247	1.708	2.324	0.959	1.389	1.956	2.727	1.103	1.616	2.409	3.528
1000	kW	0.538	0.790	1.196	1.593	2.114	0.947	1.386	1.898	2.582	1.066	1.543	2.173	3.030	1.226	1.796	2.677	3.920
1100	kW	0.592	0.869	1.316	1.752	2.325	1.042	1.525	2.088	2.840	1.173	1.697	2.390	3.333	1.349	1.976	2.945	4.312
1200	kW	0.646	0.948	1.435	1.912	2.537	1.136	1.663	2.278	3.098	1.279	1.852	2.608	3.636	1.471	2.155	3.212	4.704
1400	kW	0.753	1.106	1.674	2.230	2.960	1.326	1.940	2.657	3.615	1.492	2.160	3.042	4.242	1.716	2.514	3.748	5.488
1600	kW	0.861	1.264	1.914	2.549	3.382	1.515	2.218	3.037	4.131	1.706	2.469	3.477	4.848	-	-	-	-
1800	kW	0.968	1.422	2.153	2.867	3.805	1.705	2.495	3.416	4.648	1.919	2.777	3.911	5.454	-	-	-	-
2000	kW	1.076	1.580	2.392	3.186	4.228	1.894	2.772	3.796	5.164	2.132	3.086	4.346	6.060	-	-	-	-
2400	kW	1.291	1.896	2.870	3.823	5.074	2.273	3.326	4.555	6.197	2.558	3.703	5.215	7.272	-	-	-	-
2800	kW	1.506	2.212	3.349	4.460	5.919	2.652	3.881	5.314	7.230	2.985	4.320	6.084	8.484	-	-	-	-

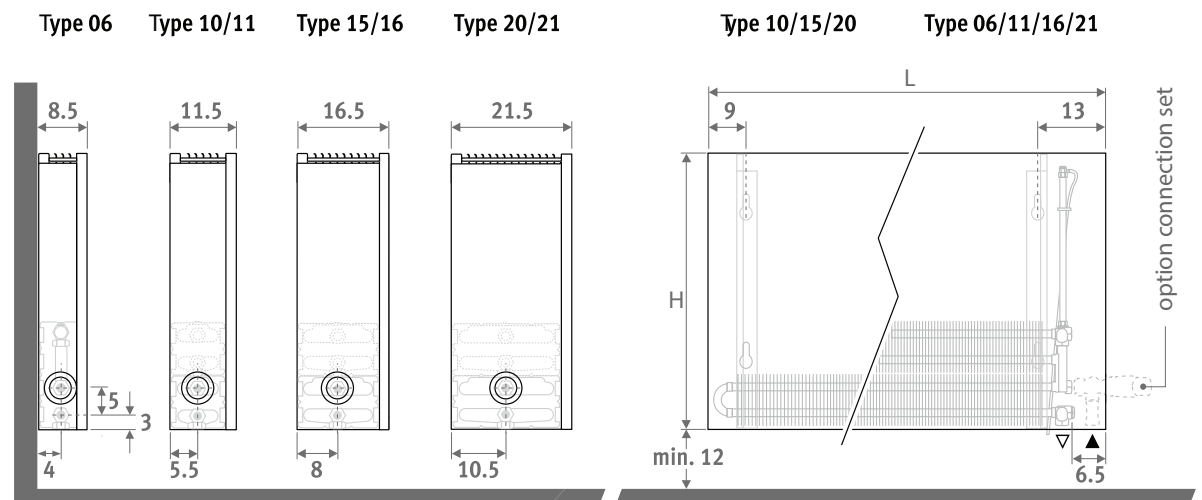

Standard connection:

Bottom end left or right, to the wall or to the floor. Connection to the wall via the bottom side of the casting, or totally concealed within the casing, according to the valve or connection set chosen.

Optional high level valve:

Thermostatic valve for operation at the top end, on the left or right side of the radiator. After mounting, only the thermostatic head remains visible at the side panel.

Remote controlled valve available as optional extra.

