

HYDRONIC TUBULAR RADIATORS

MANUFACTURED BY:



Contemporary, elegant and stylish – tubular radiators can be used as an architectural feature of your home while combining looks and warmth in one superior product.

Manufactured with great attention to appearance – a key feature of the tubular radiators is the perfectly smooth lustrous finish without any traces of weld joints, allowing you to make a statement or blend with any interior décor.

If you need confirmation of quality, every De Longhi radiator has a 10 year guarantee against design or manufacturing defects from the date of installation.



HUNT
HEATING

10 YEAR*
WARRANTY



FINISHES

High gloss white.

COLOUR

Standard white - RAL 9016.

MEASUREMENTS

Available in 2, 3, 4, 5, and 6 columns in various heights. Each section width 46mm.

Radiators supplied to order only.

SHOWROOM

11 Fiveways Boulevard
Keysborough
VIC 3173

PHONE 1300 00 1800

FAX (+613) 9798 5133

enquiries@huntheat.com.au



HUNT HEATING
The smart choice.


www.huntheat.com.au

Tables based on ΔT 50 - mean water temperature in radiator of 70°C and room temperature of 20°C. ΔT 60 mean water temperature in radiator of 80°C and room temperature of 20°C. Radiator outputs to EN442 Standard.

Height	# Columns	Output Kw ΔT 50 ΔT 60		Height	# Columns	Output Kw ΔT 50 ΔT 60		Height	# Columns	Output Kw ΔT 50 ΔT 60		Height	# Columns	Output Kw ΔT 50 ΔT 60	
300	2	0.024	0.030	750	2	0.055	0.069	1500	2	0.106	0.135	2500	2	0.180	0.229
	3	0.033	0.042		3	0.074	0.094		3	0.144	0.183		3	0.246	0.312
	4	0.042	0.053		4	0.100	0.126		4	0.194	0.247		4	0.322	0.409
	5	0.052	0.065		5	0.119	0.151		5	0.228	0.291		5	0.380	0.483
	6	0.062	0.078		6	0.144	0.183		6	0.276	0.351		6	0.452	0.576
400	2	0.031	0.039	900	2	0.065	0.082	1800	2	0.128	0.162	2800	2	0.204	0.259
	3	0.042	0.053		3	0.088	0.111		3	0.174	0.221		3	0.279	0.354
	4	0.055	0.070		4	0.119	0.150		4	0.232	0.295		4	0.362	0.458
	5	0.067	0.085		5	0.141	0.179		5	0.273	0.349		5	0.427	0.542
	6	0.081	0.102		6	0.171	0.217		6	0.329	0.419		6	0.506	0.644
500	2	0.038	0.048	1000	2	0.072	0.091	2000	2	0.142	0.181	3000	2	0.218	0.277
	3	0.052	0.065		3	0.097	0.123		3	0.194	0.246		3	0.302	0.383
	4	0.068	0.086		4	0.131	0.166		4	0.258	0.328		4	0.388	0.491
	5	0.082	0.104		5	0.155	0.197		5	0.303	0.387		5	0.459	0.583
	6	0.099	0.125		6	0.188	0.240		6	0.364	0.464		6	0.542	0.690
600	2	0.045	0.056	1200	2	0.086	0.108	2200	2	0.157	0.200	*Other heights available on request			
	3	0.061	0.076		3	0.116	0.147		3	0.214	0.272				
	4	0.081	0.102		4	0.157	0.198		4	0.283	0.360				
	5	0.097	0.122		5	0.185	0.235		5	0.333	0.425				
	6	0.117	0.149		6	0.224	0.285		6	0.399	0.508				


Each section width 46mm

Installation Dimensions

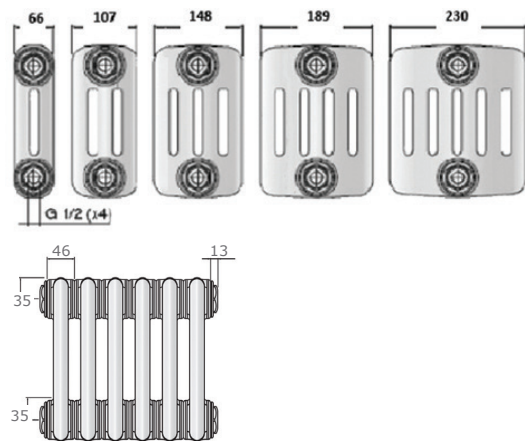

Optional Feet Installation (additional cost)

Type A foot for 2 column



Type B foot for all other sections





GBT Wall Bracket

Centre of noggins 70mm from top of radiators. Suggested size for noggins; 90mm x 45mm framing timber


Connection Possibilities

standard



The standard configuration has four 1/2" reductions and one 1/2" pre-mounted blanking plug.

from/to upper side/lower side

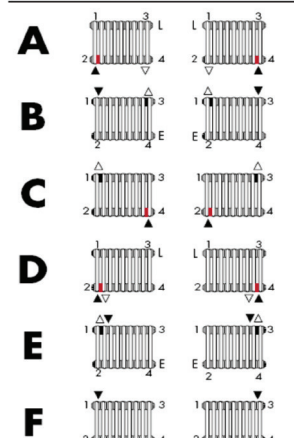

centre connection

