

LUNA3 COMFORT INTERNAL BOILER

MANUFACTURED BY:

BAXI

- Compact wall mounted and easy to install
- AGA approved outdoor models
- Conventional type boiler ideal for smaller households and apartments
- Available in Heating Only (31kW)
- Removable remote control panel, easy adjustment of heating settings
- Front access for easy servicing
- Stainless Steel burner, WaterMark certified
- BAXI European Quality, AGA approved
- Warranty 3 Yr Boiler, 5 Yr Heat Exchanger



**3 YEAR*
WARRANTY**



MODELS

Baxi Luna3 Comfort 31kW Heating Only

MEASUREMENTS

763 (H) x 450 (W) x 350 (D) mm

Easy to Use Control Panel



MELBOURNE

Head Office & Showroom
11 Fiveways Blvd
Keysborough VIC 3173
P: 1300 001 800

SYDNEY

Showroom & Warehouse
Unit G7, Alexandria Industrial Estate
35-39 Bourke Road, Alexandria NSW 2015
P: 02 7209 6235




enquiries@huntheat.com.au



huntheat.com.au


Specifications		Heating Only
		31kW
Luna3 Comfort Model Code		LUNA3-31 FIN (or FIL)
Nominal gas consumption	Mj/h	141
Minimum gas consumption	Mj/h	55
Maximum heat output (80/60°C)	kW	31
Minimum heat output (80/60°C)	kW	10.4
SEDBUK energy efficiency class		C
Maximum Efficiency (nominal)	%	93.1
Efficiency at 30% capacity	%	90.8
Min-Max water circuit pressure (heating)	bar	0.5-3.0
Min-Max water circuit pressure (DHW)	bar	-
DHW production at 25°C	l/min	-
DHW production at 35°C	l/min	-
Heating temperature range	°C	30-85
Modulation Turndown Ratio		1:3
Expansion Tank Capacity	L	10
Coaxial flue system connection	mm	60/100
Min /Max flue flow rate	kg/s	0.018/0.019
Maximum flue temperature	°C	145
Power consumption	W	165
Dimensions (ID dxwxh)	mm	[350x450x763]
Dry weight ID	kg	40
Gas type (natural / propane)		NG/LPG
Gas input pressure (natural / propane)	kPa	1.13/2.75
Power Supply	V/Hz	230-240V/50
Noise level at 1 metre	db(A)	<50

Dimensions

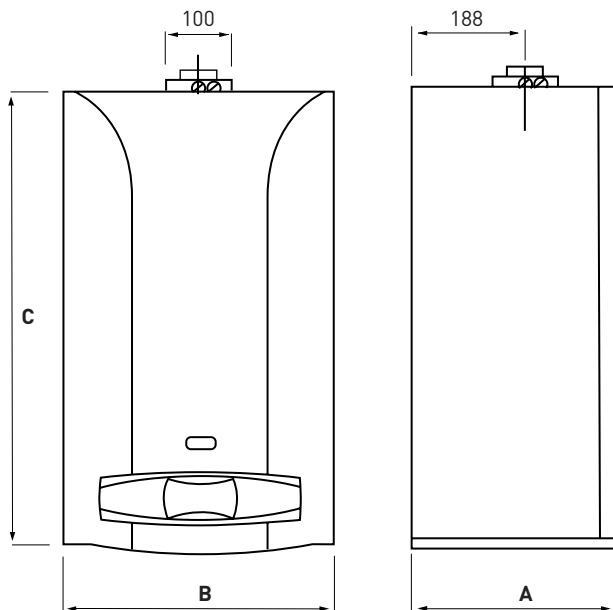

Measurements	Internal
A = Depth	350 mm
B = Width	450 mm
C = Height	763 mm

Connections

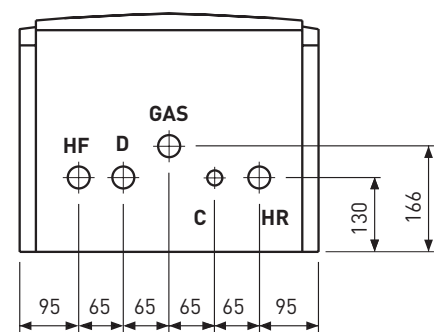

All Models		
HF	Heating Flow	3/4"
HR	Heating Return	3/4"
D	Domestic Hot Water	1/2"
GAS	Gas Inlet	3/4"
C	Cold Feed	1/2"